
TFLEX-G2TM SERIES

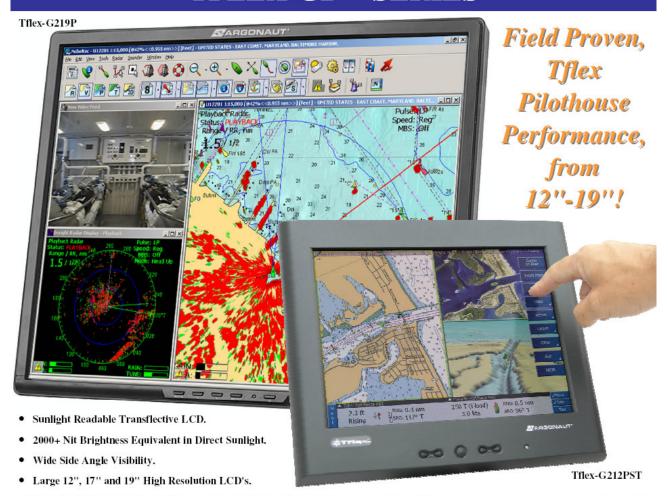

- Optional 12" SunTouchTM Sunlight Readable Touch Screen (G212PST)
- Ideal for Pilothouse or Other Sheltered Installations.
- · Internal Corrosion Resistant Electronics.
- Acrylic Dimming Filter for Night Running (Optional).
- Flush or RAM Mount Design.
- A/C or 12 Volt Power Ready (Optional DC/DC Converter).

The Argonaut Tflex-G2P pilothouse monitor series offers you solid sunlight viewable performance and value. These monitors are optically engineered to work in high glare conditions such as pilothouses or other bright protected vessel areas. Corrosion protected electronics keep these monitors working smoothly in the marine environment. A wide range of sizes including 12", 17" and 19" are available for practically any vessel. The 12" model also can be optionally equipped with our latest touch screen innovation called "SunTouch". Traditional touch screen technology is very difficult to see in direct sunshine. Argonaut's G212P-ST, SunTouch equipped monitor uses advanced optical index matching technology to bring you truly remarkable touch screen readability in direct, bright sunshine!

Compact designs allow mounting these large format screens in surprisingly tight spaces. The G219P monitor, for example, provides a huge 19" diagonal viewing area and has an outer frame edge that extends only one centimeter around all sides! Ideal for dramatic glass bridge installations, the G219P is priced thousands below competitive products at only \$1,795!

Argonaut's proprietary Tflex technology is the world's most advanced approach to sunlight readability. The brighter the light on the display surface, the brighter the screen becomes as Tflex optical technology harnesses light energy and reflects it back out through the image. Dynamic engineering effectively lowers heat and power consumption over old style high bright displays, increasing life expectancy and reliability. The standard VGA port gives you an easy connection to any PC, or the latest generation black box marine electronics and optional video or DVI connections are available. Argonaut revolutionized the use of Tflex technology with mission critical performance, reliability and value!





PERMAC ELECTRONICS LTD

22 Buckles Way, Banstead, Surrey. SM7 1HD Tel +44 (0)1276 675714 Fax +44 (0)1276 675725 Email info@permac.co.uk www.permac.co.uk



Argonaut[®] Tflex-G2TM Series Specifications

MSRP \$1,295



MSRP \$1,395





Tflex-G212P

Display Type	
Transflective TFT	
Color LCD	
Display Area (Diagona	d)
12.1*	6
Resolution/Pixels	
SVGA/800x600	
Sunlight View	
2000+ cd/m21	
Nightview Backlight	
300 nits (cd/m²) typical	
Input Signal Video	
SVGA	
User Control	
Power on/off with LED,	Menu, Select, Adjustment (up/down)
OSD	
	GB Contrast, Auto Setup, Frequency Phase, play Mode/Freq, Recall
Refresh Rate	
Up to 85Hz	
Power Supply	
Universal 100~240VAC	; DC 12V/3.33A
EMI	
C-UL, FCC,CE, UL, BSI	M1
Environmental	

User Control

Display Type	
Transflective TFT	
Color LCD	
Display Area (Diagonal)	
17*	
Resolution/Pixels	
SXGA/1280x1024	
Sunlight View	

Nightview Backlight

475 nits (cd/m²) typical	
nput Signal Video	
XGA	

	Menu/Exit, Auto Ad	just/Confirm, Up.	Down,	Power
--	--------------------	-------------------	-------	-------

OSD	
Auto Adjust, Contrast, Brightness, Color Adjust	st, Information, Image
Adjust, H/V Position, H Size, Fine Tune, Setu	Menu, Language
Select, Resolution Notice, OSD Position, OSD	Timeout, Memory
Recall	30

Select, Resolution Notice, OSD Position, OSD Timeout, Memor Recall	
Refresh Rate	

Up to 75Hz	
Power Supply	
Universal 100~240VAC, 50/60Hz (Internal Power Supply	()
EMI	

cULus, FCC, CE, ISO13406-2	
Environmental	
Operating Temperature: 32°F~100°F	

Operating Altitude: to 10,000 feet	
Internal VCI corrosion protection	
Dimensions (HxWxD Inches)/Weight	
14.7% 15.8% 2.4"/10.1lbs	

Flush mount; Adjustable RAM Mount (optional)

MSRP \$1,795

п	fle	7.	G	21	9	P	
-	_	_		_	-	-	•

Tflex-G219P	
Display Type	
Transflective TFT	
Color LCD	
Display Area (Diagonal)	
19"	
Resolution/Pixels	
SXGA/1280x1024	
Sunlight View	
2000+ cd/m21	
Nightview Backlight	
500 nits (cd/m²) typical	
Input Signal Video	
SXGA	
User Control	

Menue/Exit, Auto Adjust/Confirm, Up, Down, Power

Auto Adjust, Contrast, Brightness, Color Adjust, Information, Image Adjust, HW Position, H Size, Fine Tune, Setup Menu, Language Select, Resolution Notice, OSD Position, OSD Timeout, Memory Recall

Refresh Rate	
Up to 75Hz	
Power Supply	
Universal 100-240VAC: DC 12V/3 33A	

cULus, FCC, CE, ISO13406-2	
Environmental	
Operating Temperature: 32°F~100°F	
Operating Altitude: to 10,000 feet	

Dimensions (HxWxD Inches)/Weight 16.3"x17.1"x2.4"/12.3lbs

Flush mount; Adjustable RAM Mount (optional)

Package with:

Argonaut Tflex-G212PST

Operating Altitude: to 10,000 feet Internal VCI corrosion protection

9.3"x12.3"x2.9"/9lbs

Dimensions (HxWxD Inches)/Weight

Flush mount; Adjustable RAM Mount (optional)



Note: The specifications and pictures are subject to change without notice ¹Brightness equivalent in direct sun.

Merlin-MX4



nterlink RFWireless Mouse

Internal VCI corrosion protection



PERMAC ELECTRONICS LTD

22 Buckles Way, Banstead, Surrey. SM7 1HD Tel +44 (0)1276 675714 Fax +44 (0)1276 675725 Email info@permac.co.uk www.permac.co.uk

